

- 1. Do not tap the microphone head**, as this will damage the microphone.
- 2. After your event**, please turn off all microphones and the iPad to prevent battery drain.
- 3. Use only the iPad** to control the system.
- 4. When using the wireless projection system**, a tutor or an authorized person appointed by the tutor must be present to operate it.
- 5. Do not connect or disconnect any cables or devices without approval**, as this will easily damage the speakers.
- 6. Please prepare a USB-C to HDMI Adapter.**

1. 請勿敲打麥克風頭部，這會損壞麥克風。
2. 活動結束後，請關閉所有麥克風和 iPad，以避免電池耗盡。
3. 請僅使用 **iPad** 來操作系統。
4. 使用無線投影系統時，必須有導師或由導師授權的人在場操作。
5. 未經許可，請勿連接或拔除任何線材或設備，這極易導致喇叭損壞。
6. 請自行準備 **USB-C to HDMI 轉換器**。

# SHUN HING TECHNOLOGY CO., LTD.


9/F, Peninsula Centre, 67 Mody Road,  
Tsimshatsui East, Kowloon, Hong Kong.  
Tel: 2313 0888 Fax: 2368 8068

## Operation Manuel of AV System


Operation Methods:

1. Controlled by iPad
2. Controlled by Manuel

### Part A: Control by iPad

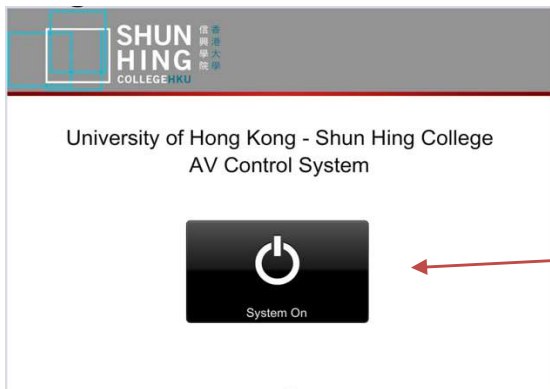

Press "**System On**"  
to entry the AV  
control system

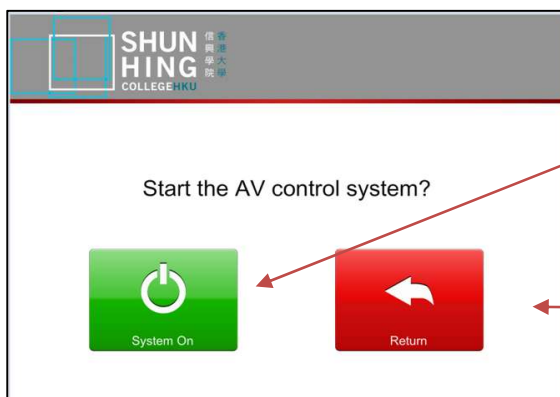

Press "**System On**"  
to start the AV  
system

Press "**Return**" to  
quit the system



Please wait for  
few seconds upon  
pressed "**System  
On**" Key

Entry the system

# SHUN HING TECHNOLOGY CO., LTD.


9/F, Peninsula Centre, 67 Mody Road,  
Tsimshatsui East, Kowloon, Hong Kong.  
Tel: 2313 0888 Fax: 2368 8068

## Operation Manuel of AV System



### 1. Lighting Control: (Ceiling Lights Dimming)

- 1st Row of Lighting: Dimming from 0% to 100% (3 Presets: 100%, 50%, 0%)
- 2nd Row of Lighting: Dimming from 0% to 100% (3 Presets: 100%, 50%, 0%)
- Level of all LED lights are 0% after system start)

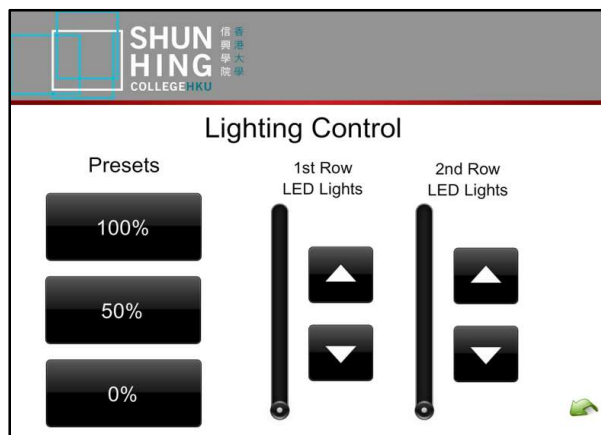

### 2. Projection System Control: (Projector & Projection Screen Functions)

- Projector: On / Off / Mute / Freeze
- "Power On" button one press to turn on projector and roll the screen down
- Projection Screen: Up / Down / Stop



## Operation Manuel of AV System

### 3. AV Source Selection: (Select Input Source to Projector)


- 3a. HDMI Mirroring: Mirroring by mobile device (iOS & Android)
  - (Mobile device(s) required to device "Air Server", Max. 12 devices)
  - The projection quality is subjected the output quality of device(s)
- 3b. PC: Device is connected to HDMI input panel under the projection screen
- 3c. Input 3: Spare
- 3d. Input 4: Spare
- 3e. Input 5: Spare
- 3f. Input 6: Spare



### 4. Audio Volume Control


- 4a. For 4 Sets of Ceiling Speakers (Near Projection Screen)
  - Press  for volume up
  - Press  for volume down
  - Press  for mute the audio
  - Press  for unmute the audio
- 4b. For 4 Sets of Ceiling Speakers (Near the Tempered Glass)
  - Press  for volume up
  - Press  for volume down
  - Press  for mute the audio
  - Press  for unmute the audio

Audio level will be resumed 0% after system restarting

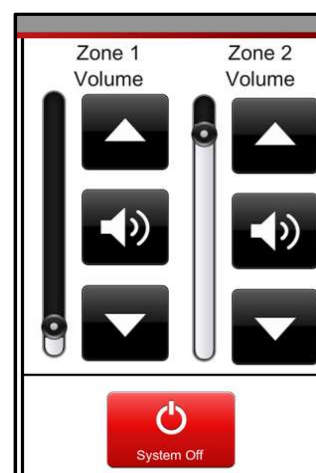

### 5. System Off: Shut Down the System

- The projector will shut down
- Projection screen will roll up
- 2 row of LED lights will be closed and controlled by On/Off Switch near the entrance
- Audio amplifiers, audio mixer and related equipment will shut down

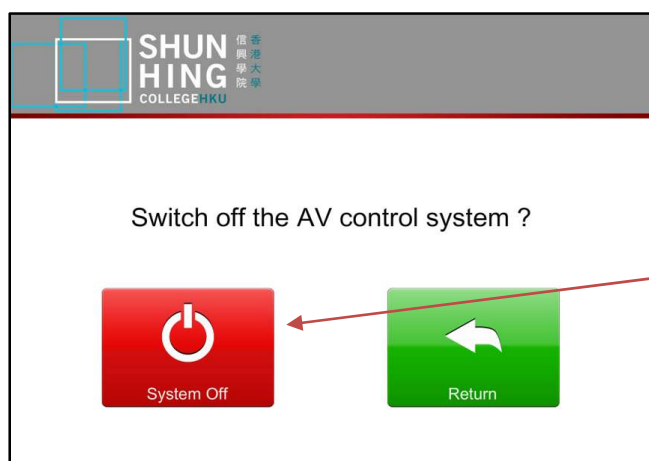


Press "**System OFF**" to shut down the system

## SHUN HING TECHNOLOGY CO., LTD.

9/F, Peninsula Centre, 67 Mody Road,  
Tsimshatsui East, Kowloon, Hong Kong.  
Tel: 2313 0888 Fax: 2368 8068

### Operation Manuel of AV System

#### Bypass Key for 1st Roll & 2nd Roll LED Lights

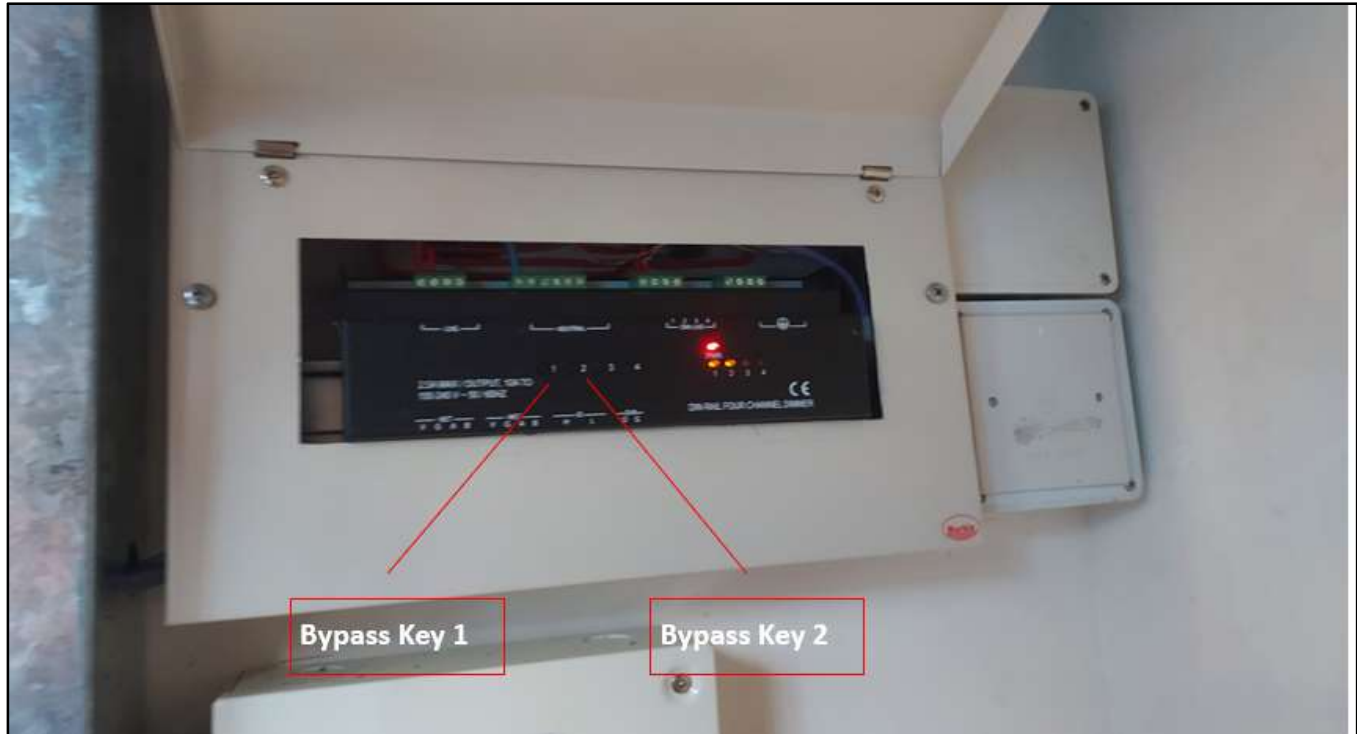

When the control system is out of order.

The user can use "Bypass Key" to dimming the brightness of LED lights.

For 1st Roll of LED Lights:

User pressed "1" button and hold a few seconds. Now the lights can be dimmed from bright to dim. When the lights is adjusted to the desired level, release the button and it is done.

For 2nd Roll of LED Lights

User pressed "2" button and hold a few seconds. Now the lights can be dimmed from bright to dim. When the lights is adjusted to the desired level, release the button and it is done.

#### Part B: Controlled by Manuel




Press "On /OFF" to  
switch on the system

# SHUN HING TECHNOLOGY CO., LTD.


9/F, Peninsula Centre, 67 Mody Road,  
Tsimshatsui East, Kowloon, Hong Kong.  
Tel: 2313 0888 Fax: 2368 8068

## Operation Manuel of AV System

### Video Projection Control

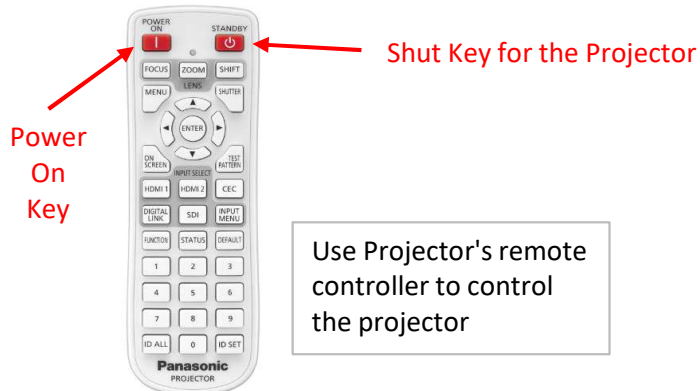

### Audio Volume Control

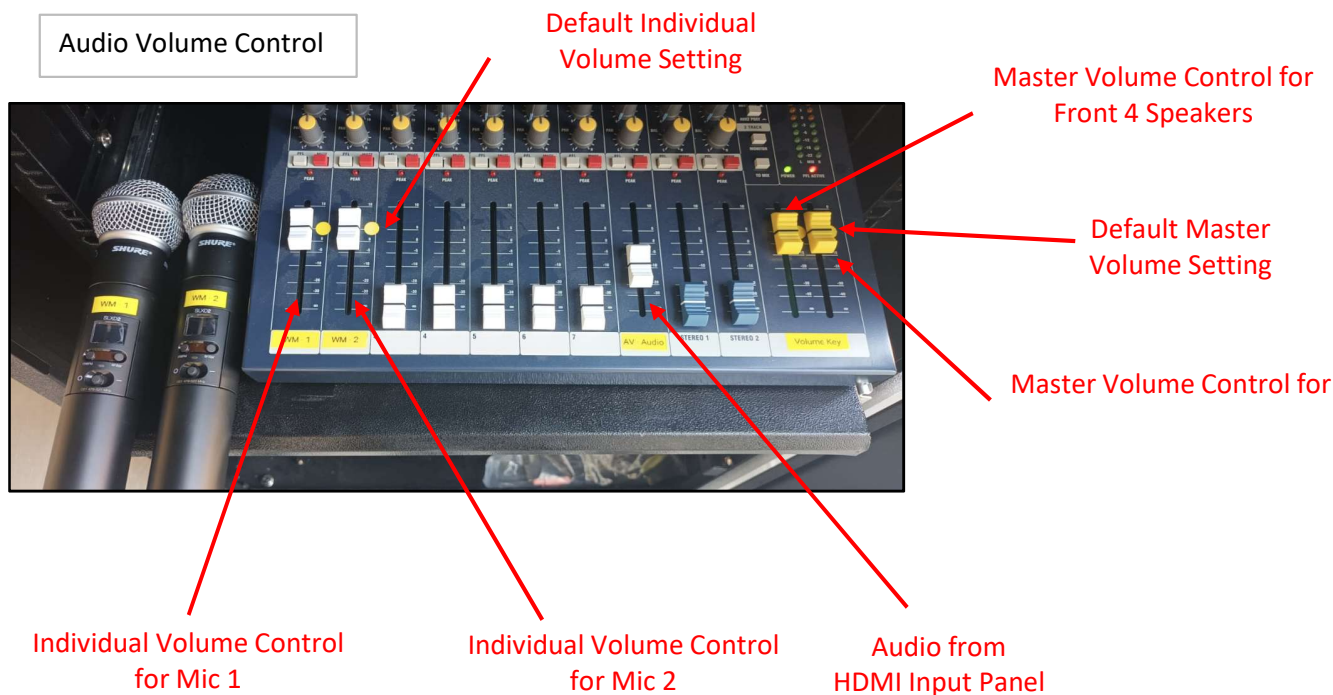

### LED Lights Control

